


Before setting up your PowerPoint file please follow the Windows 98 Printer Setup tip sheet (next page) to properly configure your Windows 98 environment.

1. Imagers prefers to receive your PowerPoint file in its native PowerPoint format. All slides should be contained in one file to avoid setup charges for multiple files.
2. A complete list of all fonts used in your file must be supplied to ensure proper output. Unsupported fonts must be supplied. (Please refer to our tip sheet regarding available fonts.)

3. Select Slide Setup from the File menu. Select 35mm slides as shown at right. (For color lasers or overheads ONLY, select Letter Paper; otherwise, follow the 35mm guidelines.)

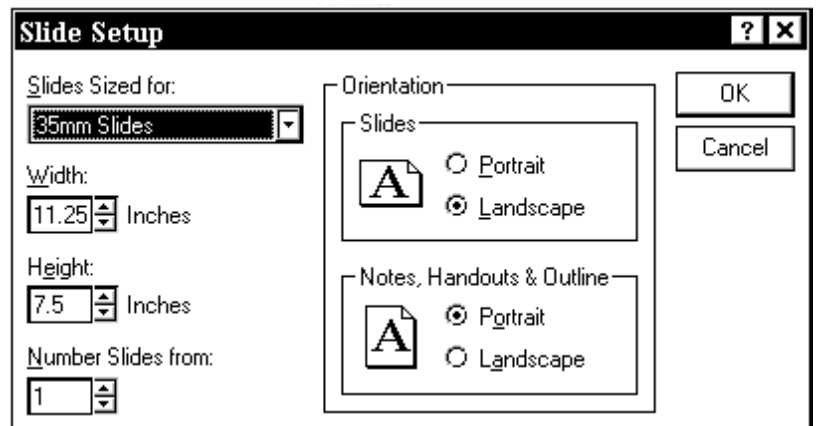

4. When placing text and/or graphics, leave a minimum margin of 1/4" on all sides to ensure clipping of image does not occur. If files are set up incorrectly output cannot be guaranteed.


5. Select Print and click Printer. Select Imagers Film Recorder (See the Windows 95 Printer Setup tip sheet for specifics/options.) It is important to choose the correct printer to ensure text does not shift or wrap. Click OK to exit the Print Setup Box, but click Cancel to exit the Print dialogue box. DO NOT actually print to a PostScript file; send the native .ppt file setup as stated above.

Abnormalities you experience to your PostScript printer usually will be duplicated when the file is output. Don't rely on your screen, test print to a PostScript printer whenever possible.

6. For best results, import photographic art files as .EPS; images imported as TIF can cause output problems.

7. Recolored items revert to their original color. Set the desired color in the originating software before inserting into Powerpoint to ensure output.

8. Avoid fills that blend diagonally. Choose a gradient fill that runs vertically for the most dependable results. Pattern fills will not image; only solid or gradient colors should be chosen for fills.

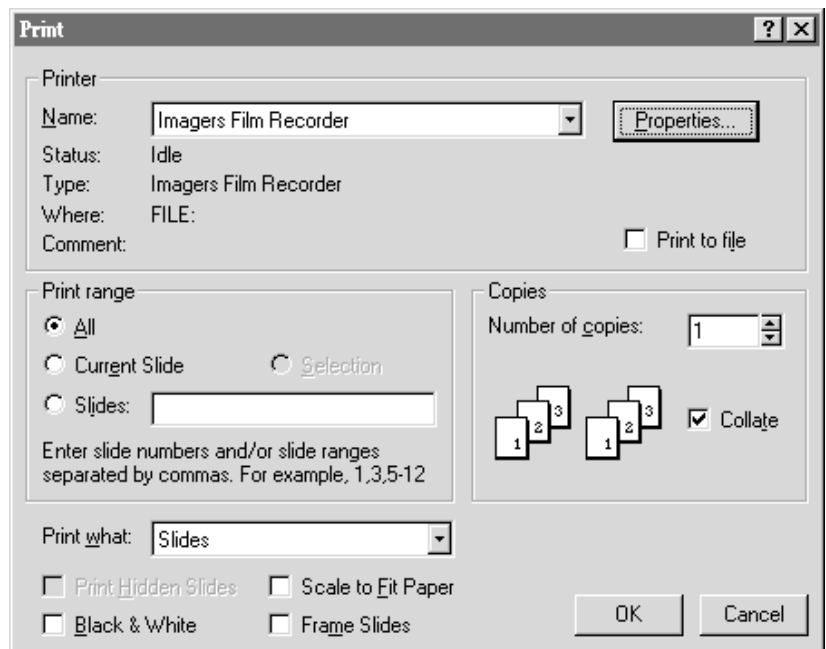

9. Additional charges will be assessed for jobs totalling over 20 megs (output file, supports, and fonts) at a rate of \$2.50 per megabyte. Jobs sent on multiple disks will incur charges of \$5.00 per disk. Removables (CD, Zip, Jaz) are suggested for large files. Do not compress files sent on removables.

For 35mm slide output, Imagers Film Recorder should be chosen as your output device. Printer files for the recorder and our other output devices are available for download from our web site at www.imagers.com in the Downloads area.

The QMS Colorscript 100 Model 10 (available on Win 95 CD) may be chosen as an alternative, but we recommend using the driver specifically designed for the the chosen output device to ensure proper output.

Install the printer as you would any Win 98 printer by clicking "Add a Printer" in the Printers dialog and following the steps. (When prompted to choose a printer click have disk and choose the directory containing the Imagers printer files.) Once the printer is installed, follow these setup guidelines:

1. Select Settings and Printers from Start menu. Right-click Imagers Film Recorder, and get Properties.
2. Select the Paper tab and set to Letter. (Fig 1)
3. Click Unprintable Area and set to zero left and right and .58 top and bottom. (Fig 2)
4. Select the PostScript tab and ensure Print PostScript error information is not checked. (Fig 3)
5. Click Advanced and select PostScript Level 2, Compress Bitmaps and Pure Binary Data. (Fig 4)

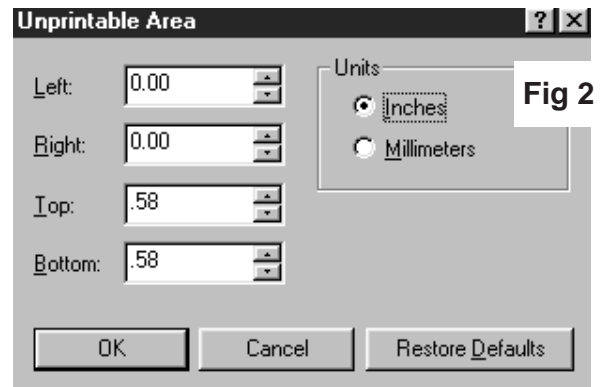


Fig 2

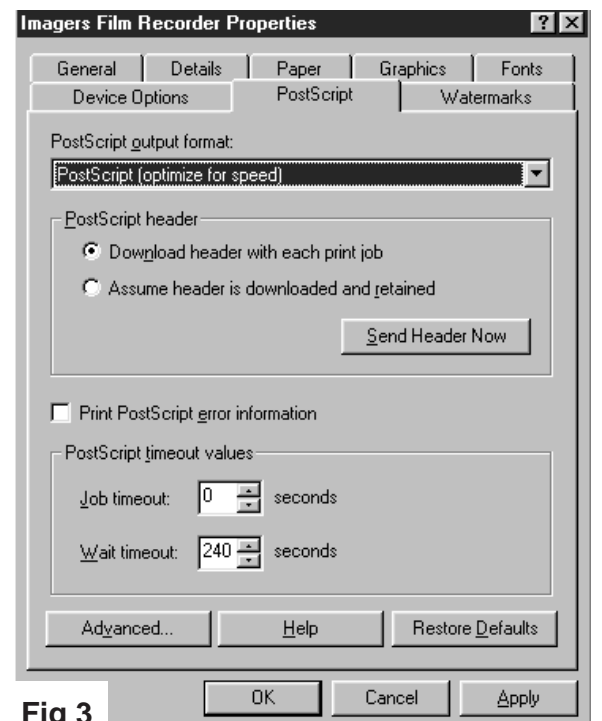


Fig 3

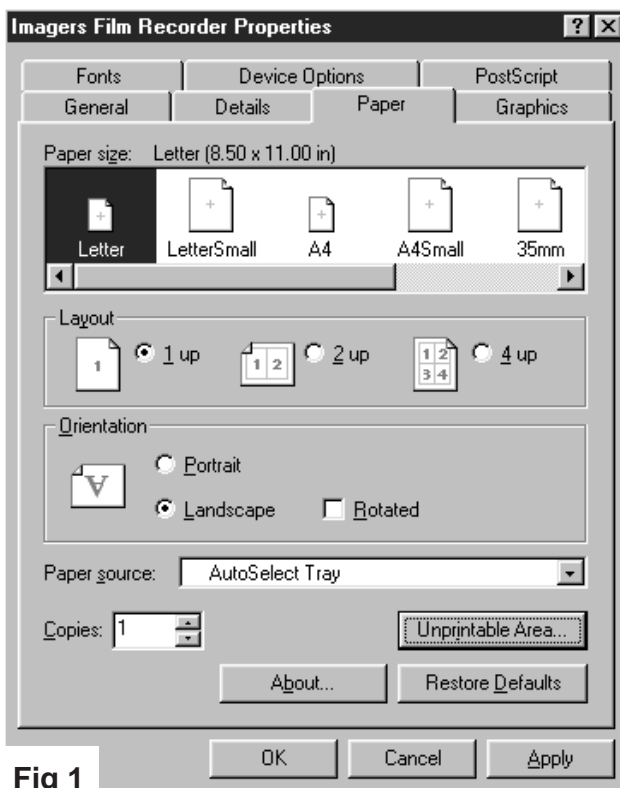


Fig 1

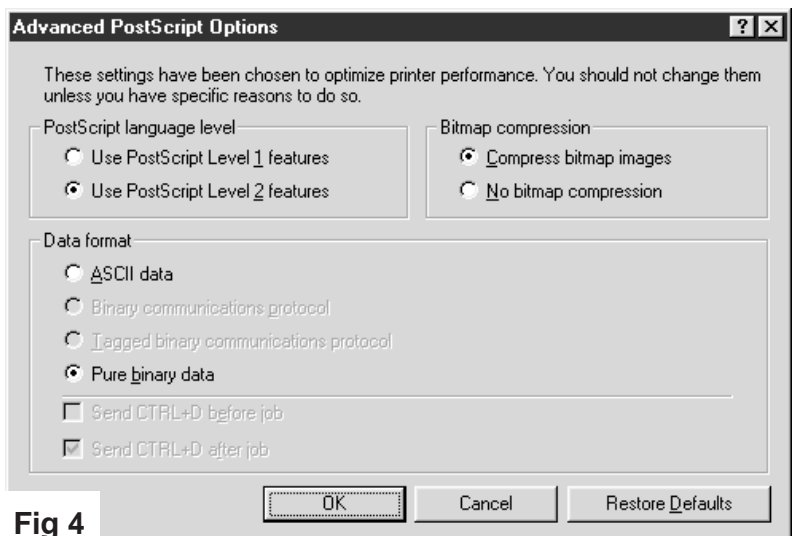


Fig 4